

For prefab slabs & double walls

CKT



Height (mm)	Length (m)	*7GR-4.5-5 Pieces/ Bundle	8GL-5-5 Pieces/ Bundle	8GL-6-6 Pieces/ Bundle	10GL-6-6 Pieces/ Bundle	12GR-6-6 Pieces/ Bundle
50	14	50				
60	14	50				
70	14	100	100	100	50	50
80	14	100	100	100	50	50
90	14	100	100	100	50	50
100	14	100	100	100	50	50
110	14	100	100	100	50	50
120	14	100	100	100	50	50
130	14	100	100	100	50	50
140	14	100	100	100	50	50
150	14	100	100	100	50	50
160	14	100	100	100	50	50
170	14	100	100	100	50	50
180	14	50	50	50	50	50
190	14	50	50	50	50	50
200	14	50	50	50	50	50
210	14		50	50	50	50
220	14		50	50	50	50
230	14		50	50	50	50
240	14		50	50	50	50
250	14		50	50	50	50
260	14		50	50	50	50
270	14		50	50	50	50
280	14		50	50	50	50
290	14		50	50	50	50
300	14		50	50	50	50
310	14				25	
320	14				25	
330	14				25	
340	14				25	

*Lattice girders marked with an asterisk are not certified for Germany.
On demand: special types with lengths between 2mts and 14mts, in steps of 10cms.

Certificates /



For the up to date scope on our certificates, we would like to refer you to our website.


For prefab slabs & double walls

CKT




Dimensions

H1	50 - 400	Calculated height	mm
H2	H1 + 8	Total height	
B1	70 - 120	Total width	
1	5 - 16	Upper wire	
2	4 - 8	Diagonal wires	
3	4 - 16	Lower wires	
U1	4	Upper protrusion	
U2	4	Lower protrusion	
Ps	200	Step of the diagonals	



H1	50	60	70	80	90	100	110	120	130	140	150	160
μ	31°	34°	38°	42°	46°	49°	52°	55°	57°	59°	60°	62°
H1	170	180	190	200	210	220	230	240	250	260	270	280
μ	63°	65°	66°	68°	69°	69°	70°	70°	71°	72°	72°	73°
H1	290	300	310	320	330	340	350	360	370	380	390	400
μ	73°	74°	74°	74°	75°	75°	76°	76°	76°	77°	77°	78°

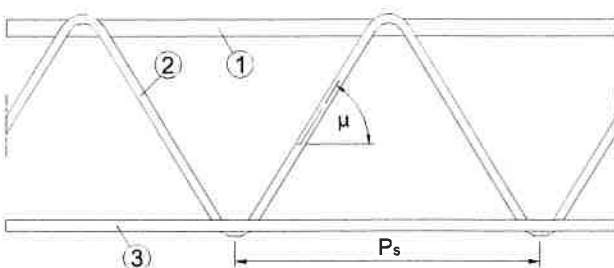

Rebar type

- Upper wire: Grade B500A-DE500BS (Ribbed or Smooth)
Grade B500B-BE500TS (Ribbed)
- Diagonal wires: Grade Smooth
- Lower wires: Grade B500A-DE500BS (Ribbed)
Grade B500B-BE500TS (Ribbed)

Certificates



For the up to date scope on our certificates, we would like to refer you to our website.