



Translation of "Certificate of Quality"

No. 79-520

Oct. 20th, 2009

Max Co., Ltd.

Production Division

Product: TW898 WIRE


1. Material SAE 1016L

Material	C	Mn	P	S
Percentage (%)	0.13%	0.60%	Less than	Less than
	~	~		
	0.18%	0.90%	0.030%	0.035%

2. Wire Tensile Strength
385 ~ 560 N/mm²

3. Surface treatment
—

4. Dimension (in mm scale)

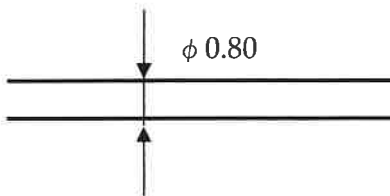

5. Resistance against rust

It should be no rust by 4cycles times under instructed test conditions.